

WO2005004491

Publication Title:

FAST MODE-DECISION ENCODING FOR INTERFRAMES

Abstract:

Abstract of WO2005004491

A video encoder (100) and corresponding methods (400, 500) are provided for selecting the mode of a current macroblock of an inter-coded frame, including one or more of checking first modes for a subset of macroblock modes, selectively checking other modes in response to motion vector information of the checked first modes, and selecting the mode for the current macroblock in response to the checked modes; checking the macroblock mode of at least one neighboring macroblock, and selecting the mode for the current macroblock in response to the macroblock mode of the at least one checked neighboring macroblock; checking the cost of a subset of macroblock modes, further checking only intra-coded modes if the checked cost meets a preset criteria, and selecting the mode for the current macroblock in response to the checked modes; and adjusting an early-stopping threshold in response to checked macroblock modes, and selecting the mode for the current macroblock in response to the checked macroblock modes if the adjusted early-stopping threshold is met.

Data supplied from the esp@cenet database - Worldwide

Courtesy of <http://v3.espacenet.com>



(43) International Publication Date
13 January 2005 (13.01.2005)

PCT

(10) International Publication Number
WO 2005/004491 A1

(51) International Patent Classification⁷: H04N 7/26, 7/50

(21) International Application Number:
PCT/US2004/019527

(22) International Filing Date: 17 June 2004 (17.06.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/482,331 25 June 2003 (25.06.2003) US

(71) Applicant (for all designated States except US): THOMSON LICENSING S.A. [FR/FR]; 46, Quai A. Le Gallo, F-92648 Boulogne (FR).

(72) Inventors; and

(75) Inventors/Applicants (for US only): YIN, Peng [CN/US]; 5508 Hunters Glen Drive, Plainsboro, NJ 08536 (US).
TOURAPIS, Alexandros, Michael [GR/US]; 20212

Heather Drive, West Windsor, NJ 08550 (US). BOYCE, Jill, MacDonald [US/US]; 3 Brandywine Court, Manalapan, NJ 07726 (US).

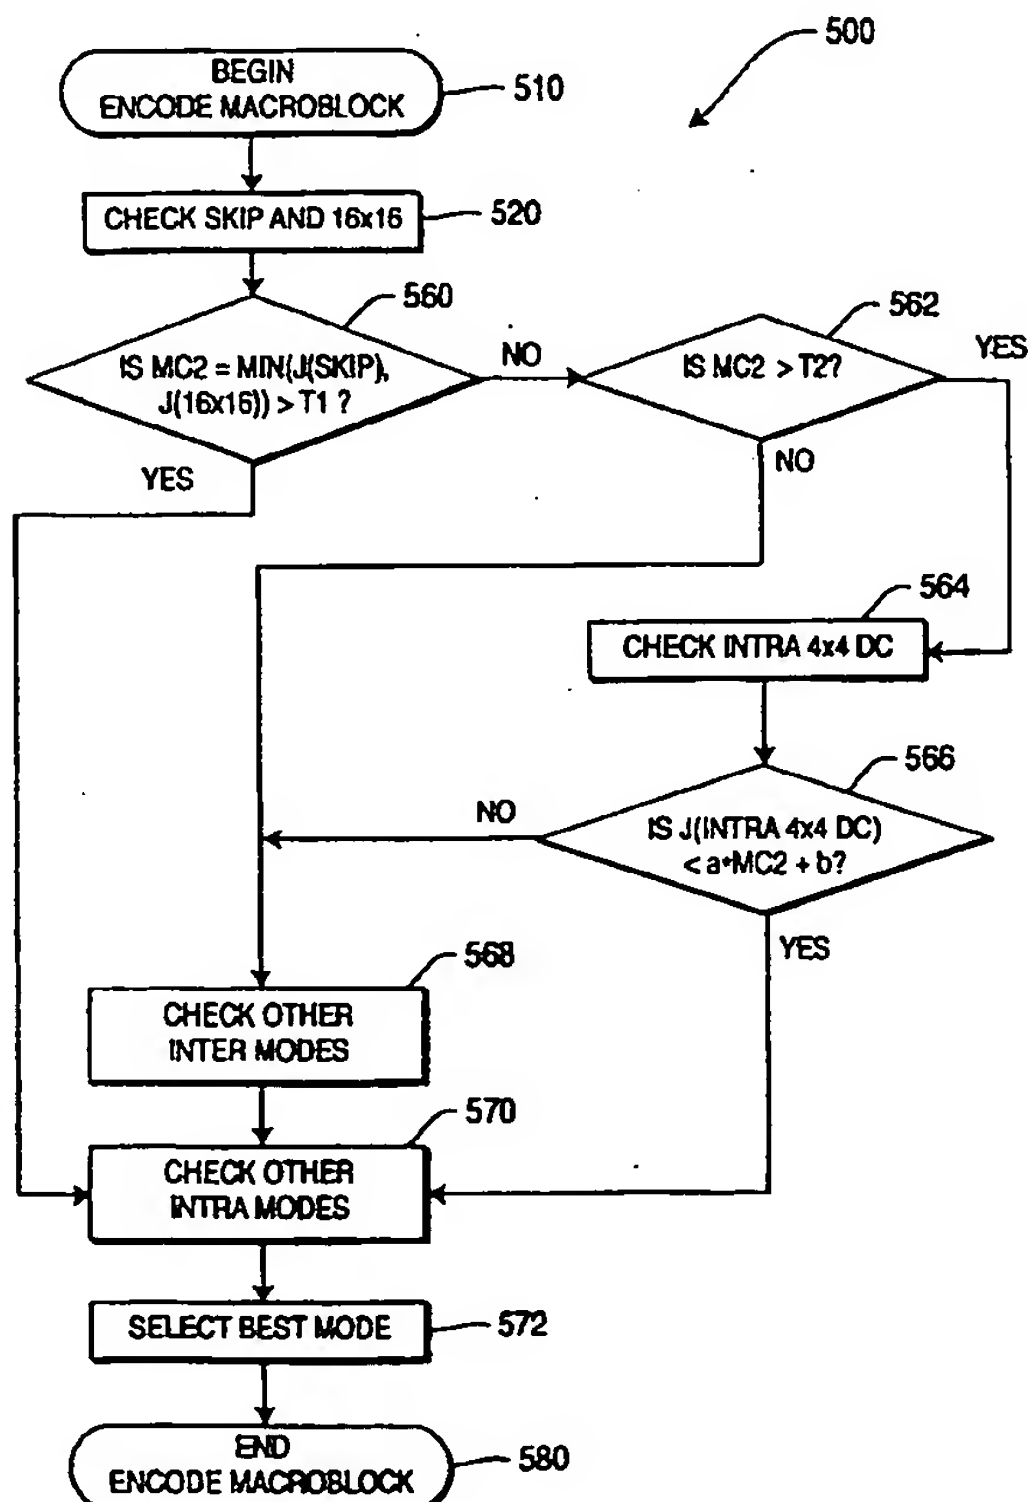
(74) Agents: TRIPOLI, Joseph, S. et al.; c/o Thomson Licensing Inc., 2 Independence Way, Suite 200, Princeton, NJ 08540 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH,

[Continued on next page]

(54) Title: FAST MODE-DECISION ENCODING FOR INTERFRAMES



(57) Abstract: A video encoder (100) and corresponding methods (400, 500) are provided for selecting the mode of a current macroblock of an inter-coded frame, including one or more of checking first modes for a subset of macroblock modes, selectively checking other modes in response to motion vector information of the checked first modes, and selecting the mode for the current macroblock in response to the checked modes; checking the macroblock mode of at least one neighboring macroblock, and selecting the mode for the current macroblock in response to the macroblock mode of the at least one checked neighboring macroblock; checking the cost of a subset of macroblock modes, further checking only intra-coded modes if the checked cost meets a preset criteria, and selecting the mode for the current macroblock in response to the checked modes; and adjusting an early-stopping threshold in response to checked macroblock modes, and selecting the mode for the current macroblock in response to the checked macroblock modes if the adjusted early-stopping threshold is met.



GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

FAST MODE-DECISION ENCODING FOR INTERFRAMES

CROSS-REFERENCE TO RELATED APPLICATION

This application claims the benefit of U.S. Provisional Application Serial No. 5 60/482,331 (Attorney Docket No. PU030164), filed June 25, 2003 and entitled "METHOD AND APPARATUS FOR FAST MODE DECISION FOR INTERFRAMES", which is incorporated herein by reference in its entirety.

FIELD OF THE INVENTION

10 The present invention is directed towards video encoders and decoders, and more particularly, towards encoders for making interframe mode decisions.

BACKGROUND OF THE INVENTION

In the JVT video compression standard, both inter and intra coding can be 15 used for interframes. The encoder needs to make a mode decision for each macroblock based on coding efficiency and subjective quality considerations. An inter mode decision is associated with motion estimation, various block sizes and multiple reference picture selection. An intra mode decision is associated with various block types and multiple spatial prediction selections. Thus, mode decisions 20 for interframes pose a large burden for the encoder. Accordingly, what is needed is a new scheme to reduce encoding decision complexity while maintaining coding efficiency.

SUMMARY OF THE INVENTION

25 These and other drawbacks and disadvantages of the prior art are addressed by an apparatus and method for fast mode-decision encoding of interframes.

A video encoder and corresponding methods are provided for selecting the mode of a current macroblock of an inter-coded frame, including one or more of checking first modes for a subset of macroblock modes, selectively checking other 30 modes in response to motion vector information of the checked first modes, and selecting the mode for the current macroblock in response to the checked modes; checking the macroblock mode of at least one neighboring macroblock, and selecting the mode for the current macroblock in response to the macroblock mode of the at least one checked neighboring macroblock; checking the cost of a subset of

macroblock modes, further checking only intra-coded modes if the checked cost meets a preset criteria, and selecting the mode for the current macroblock in response to the checked modes; and adjusting an early-stopping threshold in response to checked macroblock modes, and selecting the mode for the current
5 macroblock in response to the checked macroblock modes if the adjusted early-stopping threshold is met.

These and other aspects, features and advantages of the present invention will become apparent from the following description of exemplary embodiments, which is to be read in connection with the accompanying drawings.

10

BRIEF DESCRIPTION OF THE DRAWINGS

The present invention may be better understood with reference to the following exemplary figures, in which:

Figure 1 shows a block diagram for a video encoder for fast mode-decision
15 encoding according to an embodiment of the present invention;

Figure 2 shows a block diagram for a video decoder;

Figure 3 shows a flowchart for an exemplary motion vector encoding decision process according to an embodiment of the present invention; and

Figure 4 shows a flowchart for an exemplary mixed inter and intra encoding
20 decision process according to an embodiment of the present invention.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

Inter and intra coding methods are each used to encode interframes in compliance with video compression standards. Generally, an encoder makes an
25 inter or intra coding decision for each macroblock based on coding efficiency and subjective quality considerations. In the JVT video compression standard, inter coding allows various block partitions in a 16x16 macroblock (in particular, 16x16, 16x8, 8x16, 8x8 for a macroblock, and 8x8, 8x4, 4x8, 4x4 for a 8x8 sub-macroblock), as well as multiple reference pictures. In addition, JVT also supports skip and intra
30 modes. Intra modes include two types: INTRA4x4 and INTRA16x16, where INTRA4x4 supports 9 modes and INTRA16x16 supports 4 modes. All of these choices have made mode decisions very complicated. Embodiments of the present invention simplify mode decisions by reducing the number of potential candidate modes that need to be examined.

Both inter and intra coding are used for interframes (P and B frames) in JVT (which is also known as H.264 and MPEG AVC). Each individual macroblock is either coded as intra by using only spatial correlation, or coded as inter using temporal correlation from previously coded frames. Generally, an encoder makes an inter/intra coding decision for each macroblock based on coding efficiency and subjective quality considerations. Inter coding is typically used for macroblocks that are well predicted from previous pictures, and intra coding is generally used for macroblocks that are not well predicted from previous pictures, or for macroblocks with low spatial activity.

10 The JVT standard uses tree-structured hierarchical macroblock partitions. Inter-coded 16x16 pixel macroblocks may be broken into macroblock partitions of sizes 16x8, 8x16, or 8x8 pixels. Macroblock partitions of 8x8 pixels are also known as sub-macroblocks. Sub-macroblocks may be further broken into sub-macroblock partitions of sizes 8x4, 4x8, and 4x4 pixels. An encoder may select how to divide the
15 macroblock into partitions and sub-macroblock partitions, based on the characteristics of a particular macroblock, in order to maximize compression efficiency and subjective quality.

Multiple reference pictures may be used for inter-prediction, with a reference picture index coded to indicate which of the multiple reference pictures is used. In P pictures (or P slices), only single directional prediction is used, and the allowable
20 reference pictures are managed in list 0. In B pictures (or B slices), two lists of reference pictures are managed, list 0 and list 1. In B pictures (or B slices), single directional prediction using either list 0 or list 1 is allowed, and bi-prediction using both list 0 and list 1 is allowed. When bi-prediction is used, the list 0 and the list 1
25 predictors are averaged together to form a final predictor.

Each macroblock partition may have an independent reference picture index, prediction type (list 0, list 1, bipred), and an independent motion vector. Each sub-macroblock partition may have independent motion vectors, but all sub-macroblock partitions in the same sub-macroblock use the same reference picture index and
30 prediction type.

For inter-coded macroblocks, P frames also support SKIP mode, while B frames support both SKIP and DIRECT modes. In SKIP mode, no motion and residual information is encoded. The motion information for a SKIP macroblock is the same as a motion vector predictor specified by the picture/slice type (P or B), and

other information such as sequence and slice level parameters. The motion information is also related to other temporally or spatial adjacent macroblocks and its own macroblock position within the slice. In DIRECT mode, on the other hand, no motion information is encoded, but prediction residue is encoded. Both macroblocks and sub-macroblocks support DIRECT mode.

For intra-coded macroblocks, two block types are supported: 4x4 and 16x16. INTRA4x4 supports 9 prediction modes: vertical, horizontal, DC, diagonal down-left, diagonal down-right, vertical-left, horizontal-down, vertical-right and horizontal-up prediction. INTRA16x16 supports 4 prediction modes: vertical, horizontal, DC and plane prediction.

As for mode decisions, inter pictures need to support both inter and intra modes. Intra modes include INTRA4x4 and INTRA16x16. For P pictures, inter modes include SKIP and 16x16, 16x8, 8x16 and sub-macroblock 8x8 partitions. 8x8 further supports 8x8, 8x4, 4x8 and 4x4 partitions. For B pictures, consideration of both list 0 and list 1 and DIRECT mode are also considered for both macroblocks and sub-macroblocks.

In the JVT reference software, a Rate-Distortion Optimization (RDO) framework is used for mode decisions. For inter modes, motion estimation is considered separately from mode decisions. Motion estimation is first performed for all block types of inter modes, then the mode decision is made by comparing the cost of each inter mode and intra mode. The mode with the minimal cost is selected as the best mode.

The procedure to encode one macroblock s in a P- or B-picture is summarized as follows: Given the last decoded pictures, the Lagrangian multiplier λ_{MODE} , λ_{MOTION} , and the macroblock quantizer QP ;

Step 1: Perform motion estimation and reference picture selection by minimizing:

$$J(REF, \mathbf{m}(REF) | \lambda_{MOTION}) = SAT(D(s, c(REF, \mathbf{m}(REF))) + \lambda_{MOTION} (R(\mathbf{m}(REF)) - p(REF)) + R(REF)) \quad (\text{eq:1})$$

for each reference picture and motion vector of a possible macroblock mode. In the equation, s is the original video signal and c is the coded video signal, \mathbf{m} is the current motion vector being considered, REF denotes the reference picture, \mathbf{p} is the motion

vector used for the prediction during motion vector coding, $R(m-p)$ represents the bits used for coding motion vector and $R(REF)$ is the bits for coding reference picture. The SA(T)D is the Sum of Absolute (Transformed) Differences between original signal and reference signal predicted by the motion vector.

5

Step 2: Choose the macroblock prediction mode by minimizing:

$$J(s, c, MODE | QP, \lambda_{MODE}) = SSD(s, c, MODE | QP) + \lambda_{MODE} \cdot R(s, c, MODE | QP) \text{ (eq:2)}$$

10 given QP and λ_{MODE} when varying $MODE$. SSD denotes Sum of Square Differences between the original signal and the reconstructed signal. $R(s, c, MODE)$ is the number of bits associated with choosing $MODE$, including the bits for the macroblock header, the motion and all DCT coefficients. $MODE$ indicates a mode out of the set of potential macroblock modes:

$$P\text{-frame: } MODE \in \left\{ INTRA4x4, INTRA16x16, SKIP, \right. \\ \left. 16x16, 16, 8, 8x16, 8x8, 8x4, 4x8, 4x4 \right\}$$

$$B\text{-frame: } MODE \in \left\{ INTRA4x4, INTRA16x16, BIDIRECT, DIRECT, \right. \\ FWD16x16, FWD16X8, FWD8X16, FWD8X8, FWD8X4 \\ FWD4X8, FWD4X4, BAK16X16, BAK16X8, BAK8X16, \\ \left. BAK8X8, BAK8X4, BAK4X8, BAK4X4 \right\}$$

The INTRA4x4 contains modes:

$$MODE \in \left\{ \begin{array}{l} \text{vertical, horizontal, DC, diagonal-down-left, diagonal-down-right,} \\ \text{vertical-left, horizontal-down, vertical-right, horizontal-up} \end{array} \right\}$$

15

and INTRA16x16 contains modes: $MODE \in \{\text{vertical, horizontal, DC, plane}\}$.

This description illustrates the principles of the invention. It will thus be appreciated that those skilled in the art will be able to devise various arrangements that, although not explicitly described or shown herein, embody the principles of the invention and are included within its spirit and scope.

20

All examples and conditional language recited herein are intended for pedagogical purposes to aid the reader in understanding the principles of the invention and the concepts contributed by the inventor to furthering the art, and are to be construed as being without limitation to such specifically recited examples and
5 conditions.

Moreover, all statements herein reciting principles, aspects, and embodiments of the invention, as well as specific examples thereof, are intended to encompass both structural and functional equivalents thereof. Additionally, it is intended that such equivalents include both currently known equivalents as well as equivalents
10 developed in the future, i.e., any elements developed that perform the same function, regardless of structure.

Thus, for example, it will be appreciated by those skilled in the art that the block diagrams presented herein represent conceptual views of illustrative circuitry embodying the principles of the invention. Similarly, it will be appreciated that any
15 flow charts, flow diagrams, state transition diagrams, pseudocode, and the like represent various processes which may be substantially represented in computer readable media and so executed by a computer or processor, whether or not such computer or processor is explicitly shown.

The functions of the various elements shown in the figures may be provided
20 through the use of dedicated hardware as well as hardware capable of executing software in association with appropriate software. When provided by a processor, the functions may be provided by a single dedicated processor, by a single shared processor, or by a plurality of individual processors, some of which may be shared. Moreover, explicit use of the term "processor" or "controller" should not be construed
25 to refer exclusively to hardware capable of executing software, and may implicitly include, without limitation, digital signal processor ("DSP") hardware, read-only memory ("ROM") for storing software, random access memory ("RAM"), and non-volatile storage.

Other hardware, conventional and/or custom, may also be included. Similarly,
30 any switches shown in the figures are conceptual only. Their function may be carried out through the operation of program logic, through dedicated logic, through the interaction of program control and dedicated logic, or even manually, the particular technique being selectable by the implementer as more specifically understood from the context.

In the claims hereof, any element expressed as a means for performing a specified function is intended to encompass any way of performing that function including, for example, a) a combination of circuit elements that performs that function or b) software in any form, including, therefore, firmware, microcode or the like, combined with appropriate circuitry for executing that software to perform the function. The invention as defined by such claims resides in the fact that the functionalities provided by the various recited means are combined and brought together in the manner which the claims call for. Applicant thus regards any means that can provide those functionalities as equivalent to those shown herein.

10 As shown in Figure 1, a video encoder is indicated generally by the reference numeral 100. An input to the encoder 100 is connected in signal communication with a non-inverting input of a summing junction 110. The output of the summing junction 110 is connected in signal communication with a block transform function 120. The transform 120 is connected in signal communication with a quantizer 130. The output of the quantizer 130 is connected in signal communication with a variable length coder ("VLC") 140, where the output of the VLC 140 is an externally available output of the encoder 100.

The output of the quantizer 130 is further connected in signal communication with an inverse quantizer 150. The inverse quantizer 150 is connected in signal communication with an inverse block transformer 160, which, in turn, is connected in signal communication with a reference picture store 170. A first output of the reference picture store 170 is connected in signal communication with a first input of a motion estimator 180. The input to the encoder 100 is further connected in signal communication with a second input of the motion estimator 180. The output of the motion estimator 180 is connected in signal communication with a first input of a motion compensator 190. A second output of the reference picture store 170 is connected in signal communication with a second input of the motion compensator 190. The output of the motion compensator 190 is connected in signal communication with an inverting input of the summing junction 110.

30 Turning to Figure 2, a video decoder is indicated generally by the reference numeral 200. The video decoder 200 includes a variable length decoder ("VLD") 210 connected in signal communication with an inverse quantizer 220. The inverse quantizer is connected with an inverse transform 230. The inverse transform is connected in signal communication with a first input terminal of an adder or summing

junction 240, where the output of the summing junction 240 provides the output of the video decoder 200. The output of the summing junction 240 is connected in signal communication with a reference picture store 250. The reference picture store 250 is connected in signal communication with a motion compensator 260, which is
5 connected in signal communication with a second input terminal of the summing junction 240.

As shown in Figure 3, an exemplary process for motion vector decision encoding for a macroblock in P picture is indicated generally by the reference numeral 400. A similar process may be applied for B pictures. The process includes
10 a begin block 410 that passes control to a function block 420. The function block 420 checks for SKIP and 16x16 modes, and passes control to a decision block 422. The decision block 422 determines whether the conditions are true that a function J as in (eq:2) of SKIP mode is less than a function J of 16x16 mode and that 16x16 mode has no residue, and if not, passes control to the function block 426. If the conditions
15 are true, control passes to a decision block 424. The decision block 424 checks whether the SKIP mode has the same motion information as the 16x16 mode, and if not, passes control to the function block 426. If so, the block 424 passes control ahead to a function block 438, and thereby skips checking of other inter modes.

The function block 426 performs an 8x8 mode check and passes control to a
20 decision block 428, which checks whether an 8x8 mode has the same motion information as the 16x16 mode, and if so, passes control to a function block 432. If not, the block 428 passes control to a function block 430, which checks 16x8 and 8x16 modes, and passes control to the function block 432. The function block 432, in turn, checks a 4x4 mode, and passes control to a decision block 434. The decision
25 block 434 determines whether the 4x4 mode has the same motion information as an 8x8 mode, and if so, passes control to a function block 438. If not, the function block 434 passes control to a function block 436, which checks 8x4 and 4x8 modes, and passes control to the function block 438. The function block 438 checks for intra modes, and passes control to a function block 440, which selects the best mode.
30 The function block 440 passes control to an end block 450.

Turning to Figure 4, an exemplary process for mixed inter and intra decision encoding for a macroblock is indicated generally by the reference numeral 500. The process includes a begin block 510 that passes control to a function block 520. The function block 520 checks for SKIP and 16x16 modes, and passes control to a

decision block 560. The decision block checks if MC2, which is the minimum value between the function J evaluated for the SKIP mode and the function J evaluated for the 16x16 mode, is greater than a threshold T1. If so, control is passed ahead to a function block 570, but if not, control is passed to a decision block 562.

5 The block 562 checks whether the value MC2 from block 560 is greater than the a threshold T2 to do the comparison. If not, the block 562 passes control ahead to a function block 568, but if so, it passes control to a function block 564. The function block 564 checks the intra 4x4 DC mode, and passes control to a decision block 566. The decision block 566 determines whether the function J evaluated for
10 the intra 4x4 DC mode is less than a value a times the value MC2 plus a value b, and if not, passes control to the function block 568, but if so, passes control to the function block 570. The function block 568 checks other inter modes and passes control to the function block 570. The function block 570, in turn, checks other intra modes and passes control to a function block 572, which selects the best mode and
15 passes control to an end block 580.

Thus, in preferred embodiments of the present invention, a new algorithm is provided to alleviate the complexity on mode decisions for interframes by reducing the number of potential modes. The modes are divided into two categories: inter modes and intra modes, where inter modes include SKIP (and DIRECT for B
20 pictures) modes and different block types (in particular, 16x16, 16x8, 8x16, 8x8, 8x4, 4x8, 4x4), and intra modes include INTRA4x4 and INTRA16x16. P pictures are used for description. The same idea can be extended to B pictures. For B pictures, in such an exemplary embodiment algorithm, SKIP mode and DIRECT mode are treated in the same way, and in sub-macroblock partitions, the DIRECT mode is also
25 taken into consideration to select the best mode for the sub-macroblock.

Embodiments provide for four technical categories, which can be jointly or independently applied:

One category is for motion vector decisions. In this category, we will first check the quadratic modes: SKIP, 16x16, 8x8, 4x4. That is, the "quadratic modes"
30 are a particular subset of the modes to be checked, which are these 4 modes: SKIP, 16x16, 8x8, and 4x4. The necessity to check other non-quadratic modes is based on the motion vector information (including motion itself, motion vector predictor and reference) of the quadratic modes. The decision of this category is based on the assumption that it is more efficient to select the largest block size that contains one

object than a smaller block size that splits one object. We first check SKIP and 16x16 mode, and if $J(\text{SKIP}) < J(16 \times 16)$ (for simplicity, we write $J(\text{MODE})$ to denote the function J as in (eq:2) evaluated for MODE) and 16x16 has no residue, we check if SKIP has the same motion vector information as 16x16. If so, SKIP is selected, and
5 there is no need to check other inter modes. Otherwise, we check 16x16 and 8x8. If they have the same motion vector information, i.e., 4 8x8 motion vectors have the same information as one 16x16, we will not check 16x8, 8x16, otherwise, we will first perform motion vector and reference selection as described above in (eq:1) for 16x8 and 8x16 respectively. If 16x8 has the same motion information as 16x16, no RDO
10 calculation is required, because $J(16 \times 8)$ is believed to be larger than $J(16 \times 16)$.

We may also consider, even though not necessary, the motion vector predictors within such decision since if they are equal it is certain that $J(16 \times 16)$ would be smaller. The same procedure can be done for 8x16. We then check 4x4. For each sub-partition in an 8x8 block, if each of the four 4x4 block motion vectors have
15 the same values as the 8x8 block, there is no need to check 4x8 and 8x4. Otherwise, we will first perform motion vector and reference selection for 4x8 and 8x4 respectively. If the two 8x4 blocks have the same motion values as the 8x8 block, no RDO calculation is required, because $J(8 \times 4)$ is believed to be larger than $J(8 \times 8)$. The same procedure can be done for 4x8. Figure 3 shows an example for the motion
20 vector decision. This process could also be performed immediately after integer motion estimation. If the integer motion vectors of the previously mentioned modes are the same, then we may also completely avoid performing sub-pixel refinement, thus reducing complexity even further.

Another category is for neighborhood decisions. H.264 uses block-coding
25 structure and the object often tends to cross the block boundary. In this category, we will make use of neighborhood information to make mode decision faster.

If the mode of the upper macroblock is 16x16, and that of left macroblock is 16x8, then the mode of the current macroblock has a high probability to be 16x8. This can be further enhanced, if necessary, by considering the modes of other
30 adjacent macroblocks, such as the one on the top-right or even of the co-located macroblock in the previous or reference picture. In this case only SKIP, 16x16 and 16x8 need to be checked, while other inter modes can be completely ignored. A similar consideration can be performed for 8x16, in particular if the mode of the left macroblock is 16x16, and that of the upper macroblock is 8x16, then only SKIP,

16x16 and 8x16 need to be checked. The same criterion can be used for sub-macroblock mode decision. That is, if the mode of the upper 8x8 block is 8x8, and that of left is 8x4, only 8x4 needs to be checked; if the mode of the upper 8x8 is 4x8 and that of left is 8x8, only 4x8 needs to be checked. If the mode of upper
 5 macroblock and left macroblock is intra, then only SKIP, 16x16 and intra modes need to be checked.

A relatively similar decision could also be applied by using temporally adjacent macroblocks (i.e. the co-located macroblock). In particular, after examining a specific mode (i.e. 16x16), if the best mode and the associated motion information
 10 are identical to that of this temporally adjacent macroblock, we can immediately terminate mode decision and avoid examining any other mode. This process could be further enhanced through the consideration of the associated distortion (e.g. if distortion of current macroblock is smaller than that of the co-located, or of a linear/non-linear combination of other temporally or/and even spatially adjacent
 15 macroblock distortions, then there is even higher probability that the termination would be correct).

Yet another category is for mixed inter and intra mode decisions. Generally, all inter modes are checked before intra modes. In this category, we will introduce a technique to mix the checking order of inter and intra modes. Two thresholds (T_1
 20 and T_2 , where $T_1 > T_2$) are set. We first check SKIP and 16x16. If the minimum cost of these two, denoted by MC_2 is larger than T_1 , we will continue to check intra modes, no other inter modes will be checked. If MC_2 is larger than T_2 , we will first check INTRA4x4 DC mode. If the cost is smaller than $a \times MC_2 + b$, where a and b can be given weight/offset parameters, only intra modes are checked; otherwise, both
 25 inter and intra modes are checked. Figure 4 shows an example for the mixed inter-intra mode decision.

An additional category is for an early stopping decision. Instead of exhaustively checking all possible modes, in our preferred embodiments of the present invention, we use early stopping criteria to reach fast mode decision. These
 30 stopping criteria are based on an adaptive thresholding mechanism. If one threshold for one particular mode is met, we stop checking other left modes. One example of how to select thresholding T for one mode $T(\text{mode})$ is described in this invention by equation (4). In the equation, $\alpha(\text{mode})$ and $\beta(\text{mode})$ are the scalars for one mode.

COST can be J, SAD, or SSD in (eq:1)(eq:2). $COST_i$ denotes the cost for i th neighboring block.

$$T(mode) = \alpha(mode) \times T_n + \beta(mode), \quad (eq:4)$$

where

$$T_n = \text{MAX}(COST_{\text{lowbound}}, \text{MIN}(COST_{\text{highbound}}, COST_1, COST_2, \dots, COST_n))$$

5

These and other features and advantages of the present invention may be readily ascertained by one of ordinary skill in the pertinent art based on the teachings herein. It is to be understood that the principles of the present invention may be implemented in various forms of hardware, software, firmware, special purpose
10 processors, or combinations thereof.

Most preferably, the principles of the present invention are implemented as a combination of hardware and software. Moreover, the software is preferably implemented as an application program tangibly embodied on a program storage unit. The application program may be uploaded to, and executed by, a machine
15 comprising any suitable architecture. Preferably, the machine is implemented on a computer platform having hardware such as one or more central processing units ("CPU"), a random access memory ("RAM"), and input/output ("I/O") interfaces. The computer platform may also include an operating system and microinstruction code. The various processes and functions described herein may be either part of the
20 microinstruction code or part of the application program, or any combination thereof, which may be executed by a CPU. In addition, various other peripheral units may be connected to the computer platform such as an additional data storage unit and a printing unit.

It is to be further understood that, because some of the constituent system
25 components and methods depicted in the accompanying drawings are preferably implemented in software, the actual connections between the system components or the process function blocks may differ depending upon the manner in which the present invention is programmed. Given the teachings herein, one of ordinary skill in the pertinent art will be able to contemplate these and similar implementations or
30 configurations of the present invention.

Although the illustrative embodiments have been described herein with reference to the accompanying drawings, it is to be understood that the present

invention is not limited to those precise embodiments, and that various changes and modifications may be effected therein by one of ordinary skill in the pertinent art without departing from the scope or spirit of the present invention. All such changes and modifications are intended to be included within the scope of the present
5 invention as set forth in the appended claims.

CLAIMS

1. A video encoding method for selecting the mode of a current macroblock of an inter-coded frame, the method comprising at least one of:
 - 5 checking first modes for a subset of macroblock modes, selectively checking other modes in response to motion vector information of the checked first modes, and selecting the mode for the current macroblock in response to the checked modes;
 - checking the macroblock mode of at least one neighboring macroblock, and selecting the mode for the current macroblock in response to the macroblock mode of
 - 10 the at least one checked neighboring macroblock;
 - checking the cost of a subset of macroblock modes, further checking only intra-coded modes if the checked cost meets a preset criteria, and selecting the mode for the current macroblock in response to the checked modes; and
 - adjusting an early-stopping threshold in response to checked macroblock
 - 15 modes, and selecting the mode for the current macroblock in response to the checked macroblock modes if the adjusted early-stopping threshold is met.
2. A video encoding method as defined in Claim 1, the method comprising checking first modes for a subset of macroblock modes, selectively checking other
- 20 modes in response to motion vector information of the checked first modes, and selecting the mode for the current macroblock in response to the checked modes.
3. A video encoding method as defined in Claim 1 wherein said first modes comprise the quadratic modes of SKIP, 16x16, 8x8, and 4x4.
- 25
4. A video encoding method as defined in Claim 1, further comprising checking the macroblock mode of at least one neighboring macroblock, and selecting the mode for the current macroblock in response to the macroblock mode of the at least one checked neighboring macroblock.
- 30
5. A video encoding method as defined in Claim 1, further comprising checking the cost of a subset of macroblock modes, further checking only intra-coded modes if the checked cost meets a preset criteria, and selecting the mode for the current macroblock in response to the checked modes.

6. A video encoding method as defined in Claim 1, further comprising adjusting an early-stopping threshold in response to checked macroblock modes, and selecting the mode for the current macroblock in response to the checked
5 macroblock modes if the adjusted early-stopping threshold is met.

7. A video encoding method as defined in Claim 1, further comprising:
initially performing motion estimation only for a subset of the possible block
sizes; and
10 using the motion information to determine if other motion estimation or complexity measures should be performed for other block sizes.

8. A video encoding method as defined in Claim 7 wherein said first modes are checked first and their motion information is used to decide if other modes
15 needs to be checked.

9. A video encoding method as defined in Claim 1 wherein spatial/temporal neighboring macroblock and block partition information is used to decide the subset of possible block sizes or inter/intra modes that need to be
20 checked.

10. A video encoding method as defined in Claim 1, further comprising:
initially performing mode checking for a subset of both inter modes and intra
modes;
25 calculating a complexity measure responsive to the mode checking; and
using the complexity measure to determine if other inter modes and intra modes should be performed.

11. A video encoding method as defined in Claim 6 wherein the early stop
30 criteria are based on adaptive thresholding to stop checking other inter or intra modes.

12. A video encoding method as defined in Claim 1 wherein early termination takes place if spatially or/and temporally neighboring macroblocks have a

specific relationship with the motion information of the current macroblock after examining a specific mode.

13. A video encoder for encoding video signal data and selecting the mode
5 of a current macroblock of an inter-coded frame, the encoder comprising at least one of:

first means for checking the first modes for a subset of macroblock modes, selectively checking other modes in response to motion vector information of the checked first modes, and selecting the mode for the current macroblock in response
10 to the checked modes;

macroblock means for checking the macroblock mode of at least one neighboring macroblock, and selecting the mode for the current macroblock in response to the macroblock mode of the at least one checked neighboring macroblock;

15 subset means for checking the cost of a subset of macroblock modes, further checking only intra-coded modes if the checked cost meets a preset criteria, and selecting the mode for the current macroblock in response to the checked modes; and

stopping means for adjusting an early-stopping threshold in response to
20 checked macroblock modes, and selecting the mode for the current macroblock in response to the checked macroblock modes if the adjusted early-stopping threshold is met.

14. A video encoder as defined in Claim 13, the encoder comprising first-
25 checking means for checking first modes for a subset of macroblock modes, selectively checking other modes in response to motion vector information of the checked first modes, and selecting the mode for the current macroblock in response to the checked modes.

30 15. A video encoder as defined in Claim 13 wherein said first modes comprise the quadratic modes of SKIP, 16x16, 8x8, and 4x4.

16. A video encoder as defined in Claim 13, further comprising neighbor-checking means for checking the macroblock mode of at least one neighboring

macroblock, and selecting the mode for the current macroblock in response to the macroblock mode of the at least one checked neighboring macroblock.

17. A video encoder as defined in Claim 13, further comprising intra-
5 checking means for checking the cost of a subset of macroblock modes, further checking only intra-coded modes if the checked cost meets a preset criteria, and selecting the mode for the current macroblock in response to the checked modes.

18. A video encoder as defined in Claim 13, further comprising thresholding
10 means for adjusting an early-stopping threshold in response to checked macroblock modes, and selecting the mode for the current macroblock in response to the checked macroblock modes if the adjusted early-stopping threshold is met.

19. A video encoder as defined in Claim 13, further comprising:
15 motion-estimation means for initially performing motion estimation only for a subset of the possible block sizes; and
determination means for using the motion information to determine if other motion estimation or complexity measures should be performed for other block sizes.

20. A video encoder as defined in Claim 19 wherein said first modes are
20 checked first and their motion information is used to decide if other modes needs to be checked.

21. A video encoder as defined in Claim 13 wherein spatial/temporal
25 neighboring macroblock and block partition information is used to decide the subset of possible block sizes or inter/intra modes that need to be checked.

22. A video encoder as defined in Claim 13, further comprising:
inter/intra checking means for initially performing mode checking for a subset
30 of both inter modes and intra modes;

complexity means for calculating a complexity measure responsive to the mode checking; and

inter/intra determination means for using the complexity measure to determine if other inter modes and intra modes should be performed.

23. A video encoder as defined in Claim 18 wherein the early stop criteria are based on adaptive thresholding to stop checking other inter or intra modes.

5 24. A video encoder as defined in Claim 13 wherein early termination takes place if spatially or/and temporally neighboring macroblocks have a specific relationship with the motion information of the current macroblock after examining a specific mode.

10 25. A digital videodisc encoded with signal data comprising a plurality of block transform coefficients, the signal data resulting from at least one of:

checking first modes for a subset of macroblock modes, selectively checking other modes in response to motion vector information of the checked first modes, and selecting the mode for the current macroblock in response to the checked modes;

15 checking the macroblock mode of at least one neighboring macroblock, and selecting the mode for the current macroblock in response to the macroblock mode of the at least one checked neighboring macroblock;

checking the cost of a subset of macroblock modes, further checking only intra-coded modes if the checked cost meets a preset criteria, and selecting the mode for the current macroblock in response to the checked modes; and

20 adjusting an early-stopping threshold in response to checked macroblock modes, and selecting the mode for the current macroblock in response to the checked macroblock modes if the adjusted early-stopping threshold is met.

25 26. A digital video disk as defined in Claim 25, the signal data resulting from checking first modes for a subset of macroblock modes, selectively checking other modes in response to motion vector information of the checked first modes, and selecting the mode for the current macroblock in response to the checked modes.

30 27. A digital video disk as defined in Claim 25 wherein said first modes comprise the quadratic modes of SKIP, 16x16, 8x8, and 4x4.

28. A digital video disk as defined in Claim 25, the signal data further resulting from checking the macroblock mode of at least one neighboring macroblock,

and selecting the mode for the current macroblock in response to the macroblock mode of the at least one checked neighboring macroblock.

29. A digital video disk as defined in Claim 25, the signal data further
5 resulting from checking the cost of a subset of macroblock modes, further checking only intra-coded modes if the checked cost meets a preset criteria, and selecting the mode for the current macroblock in response to the checked modes.

30. A digital video disk as defined in Claim 25, the signal data further
10 resulting from adjusting an early-stopping threshold in response to checked macroblock modes, and selecting the mode for the current macroblock in response to the checked macroblock modes if the adjusted early-stopping threshold is met.

31. A digital video disk as defined in Claim 25, the signal data further
15 resulting from:
initially performing motion estimation only for a subset of the possible block sizes; and
using the motion information to determine if other motion estimation or complexity measures should be performed for other block sizes.

20 32. A digital video disk as defined in Claim 31 wherein said first modes are checked first and their motion information is used to decide if other modes need to be checked.

25 33. A digital video disk as defined in Claim 25 wherein spatial/temporal neighboring macroblock and block partition information is used to decide the subset of possible block sizes or inter/intra modes that need to be checked.

30 34. A digital video disk as defined in Claim 25, the signal data further resulting from:
initially performing mode checking for a subset of both inter modes and intra modes;
calculating a complexity measure responsive to the mode checking; and

using the complexity measure to determine if other inter modes and intra modes should be performed.

35. A digital video disk as defined in Claim 30 wherein the early stop
5 criteria are based on adaptive thresholding to stop checking other inter or intra modes.

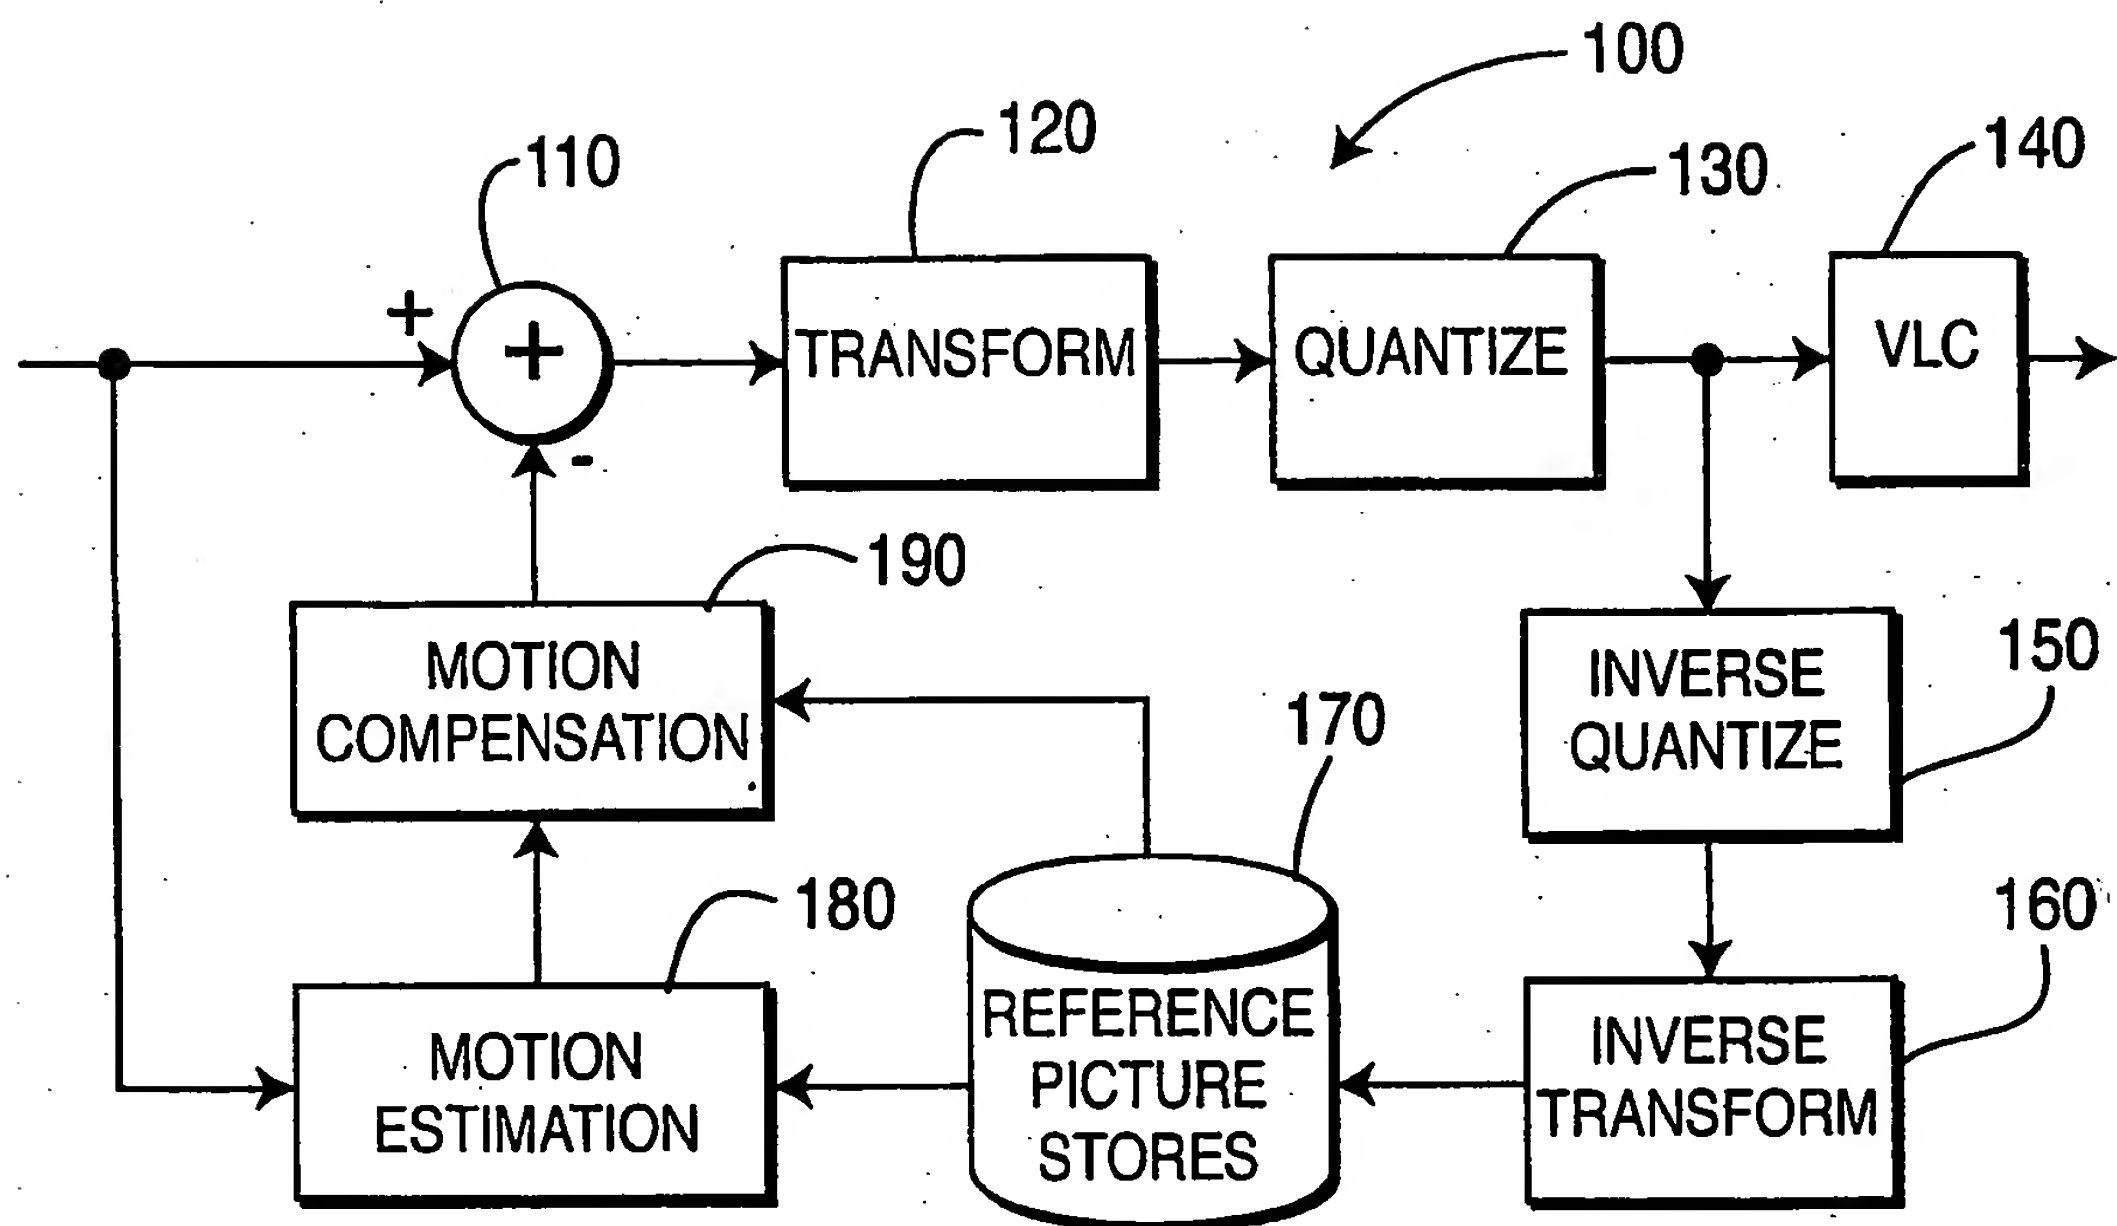
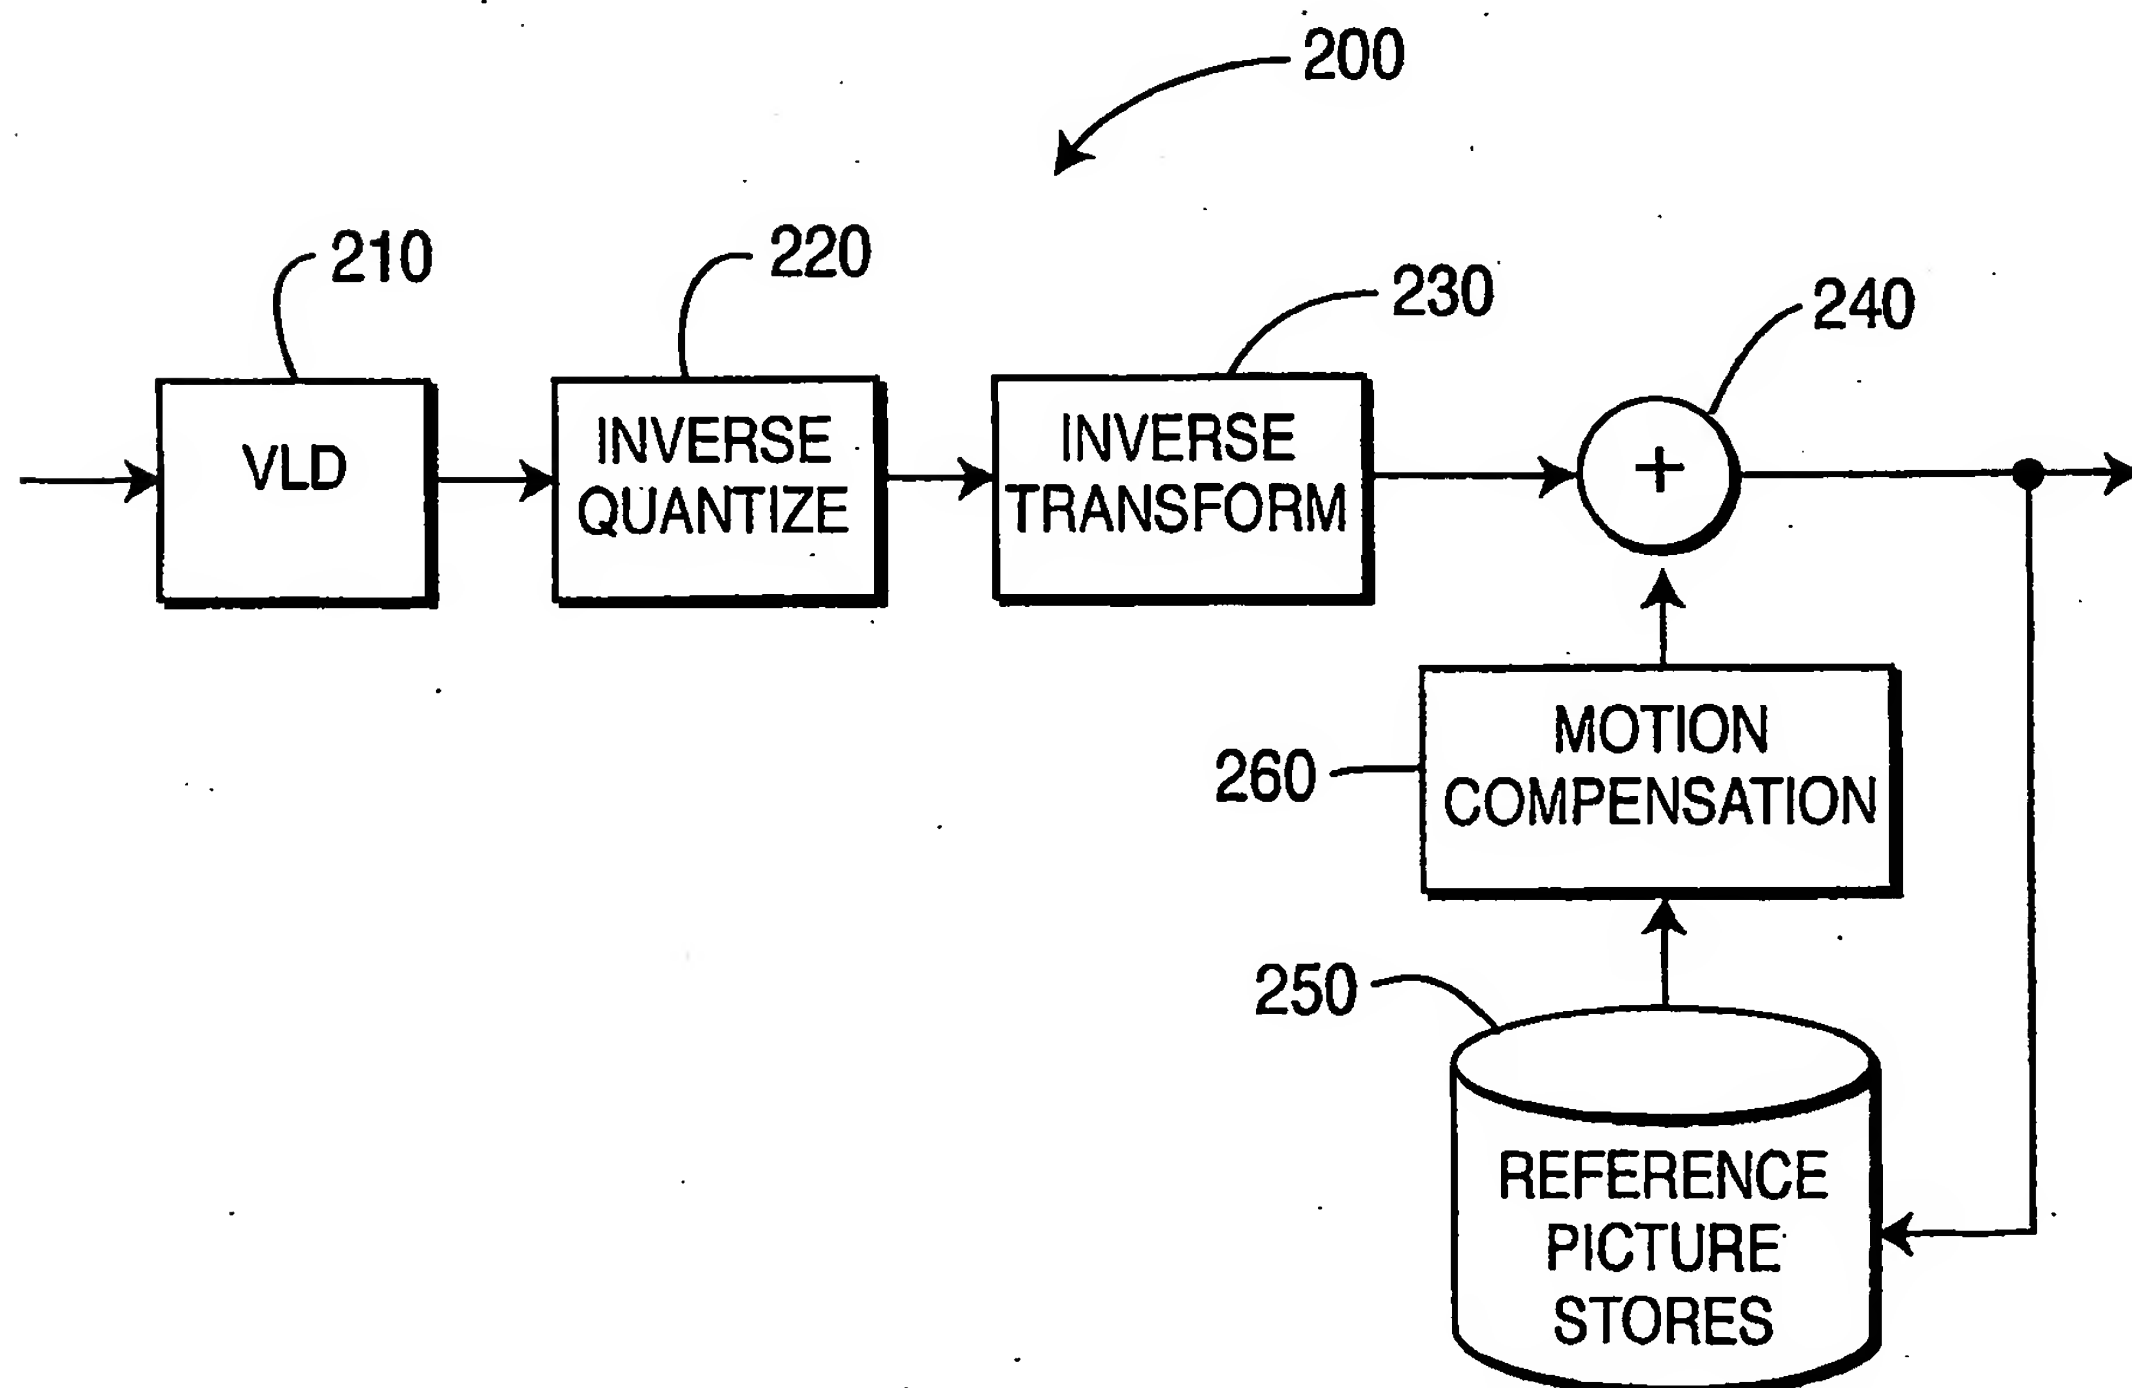
36. A digital video disk as defined in Claim 25 wherein early termination
takes place if spatially or/and temporally neighboring macroblocks have a specific
10 relationship with the motion information of the current macroblock after examining a specific mode.

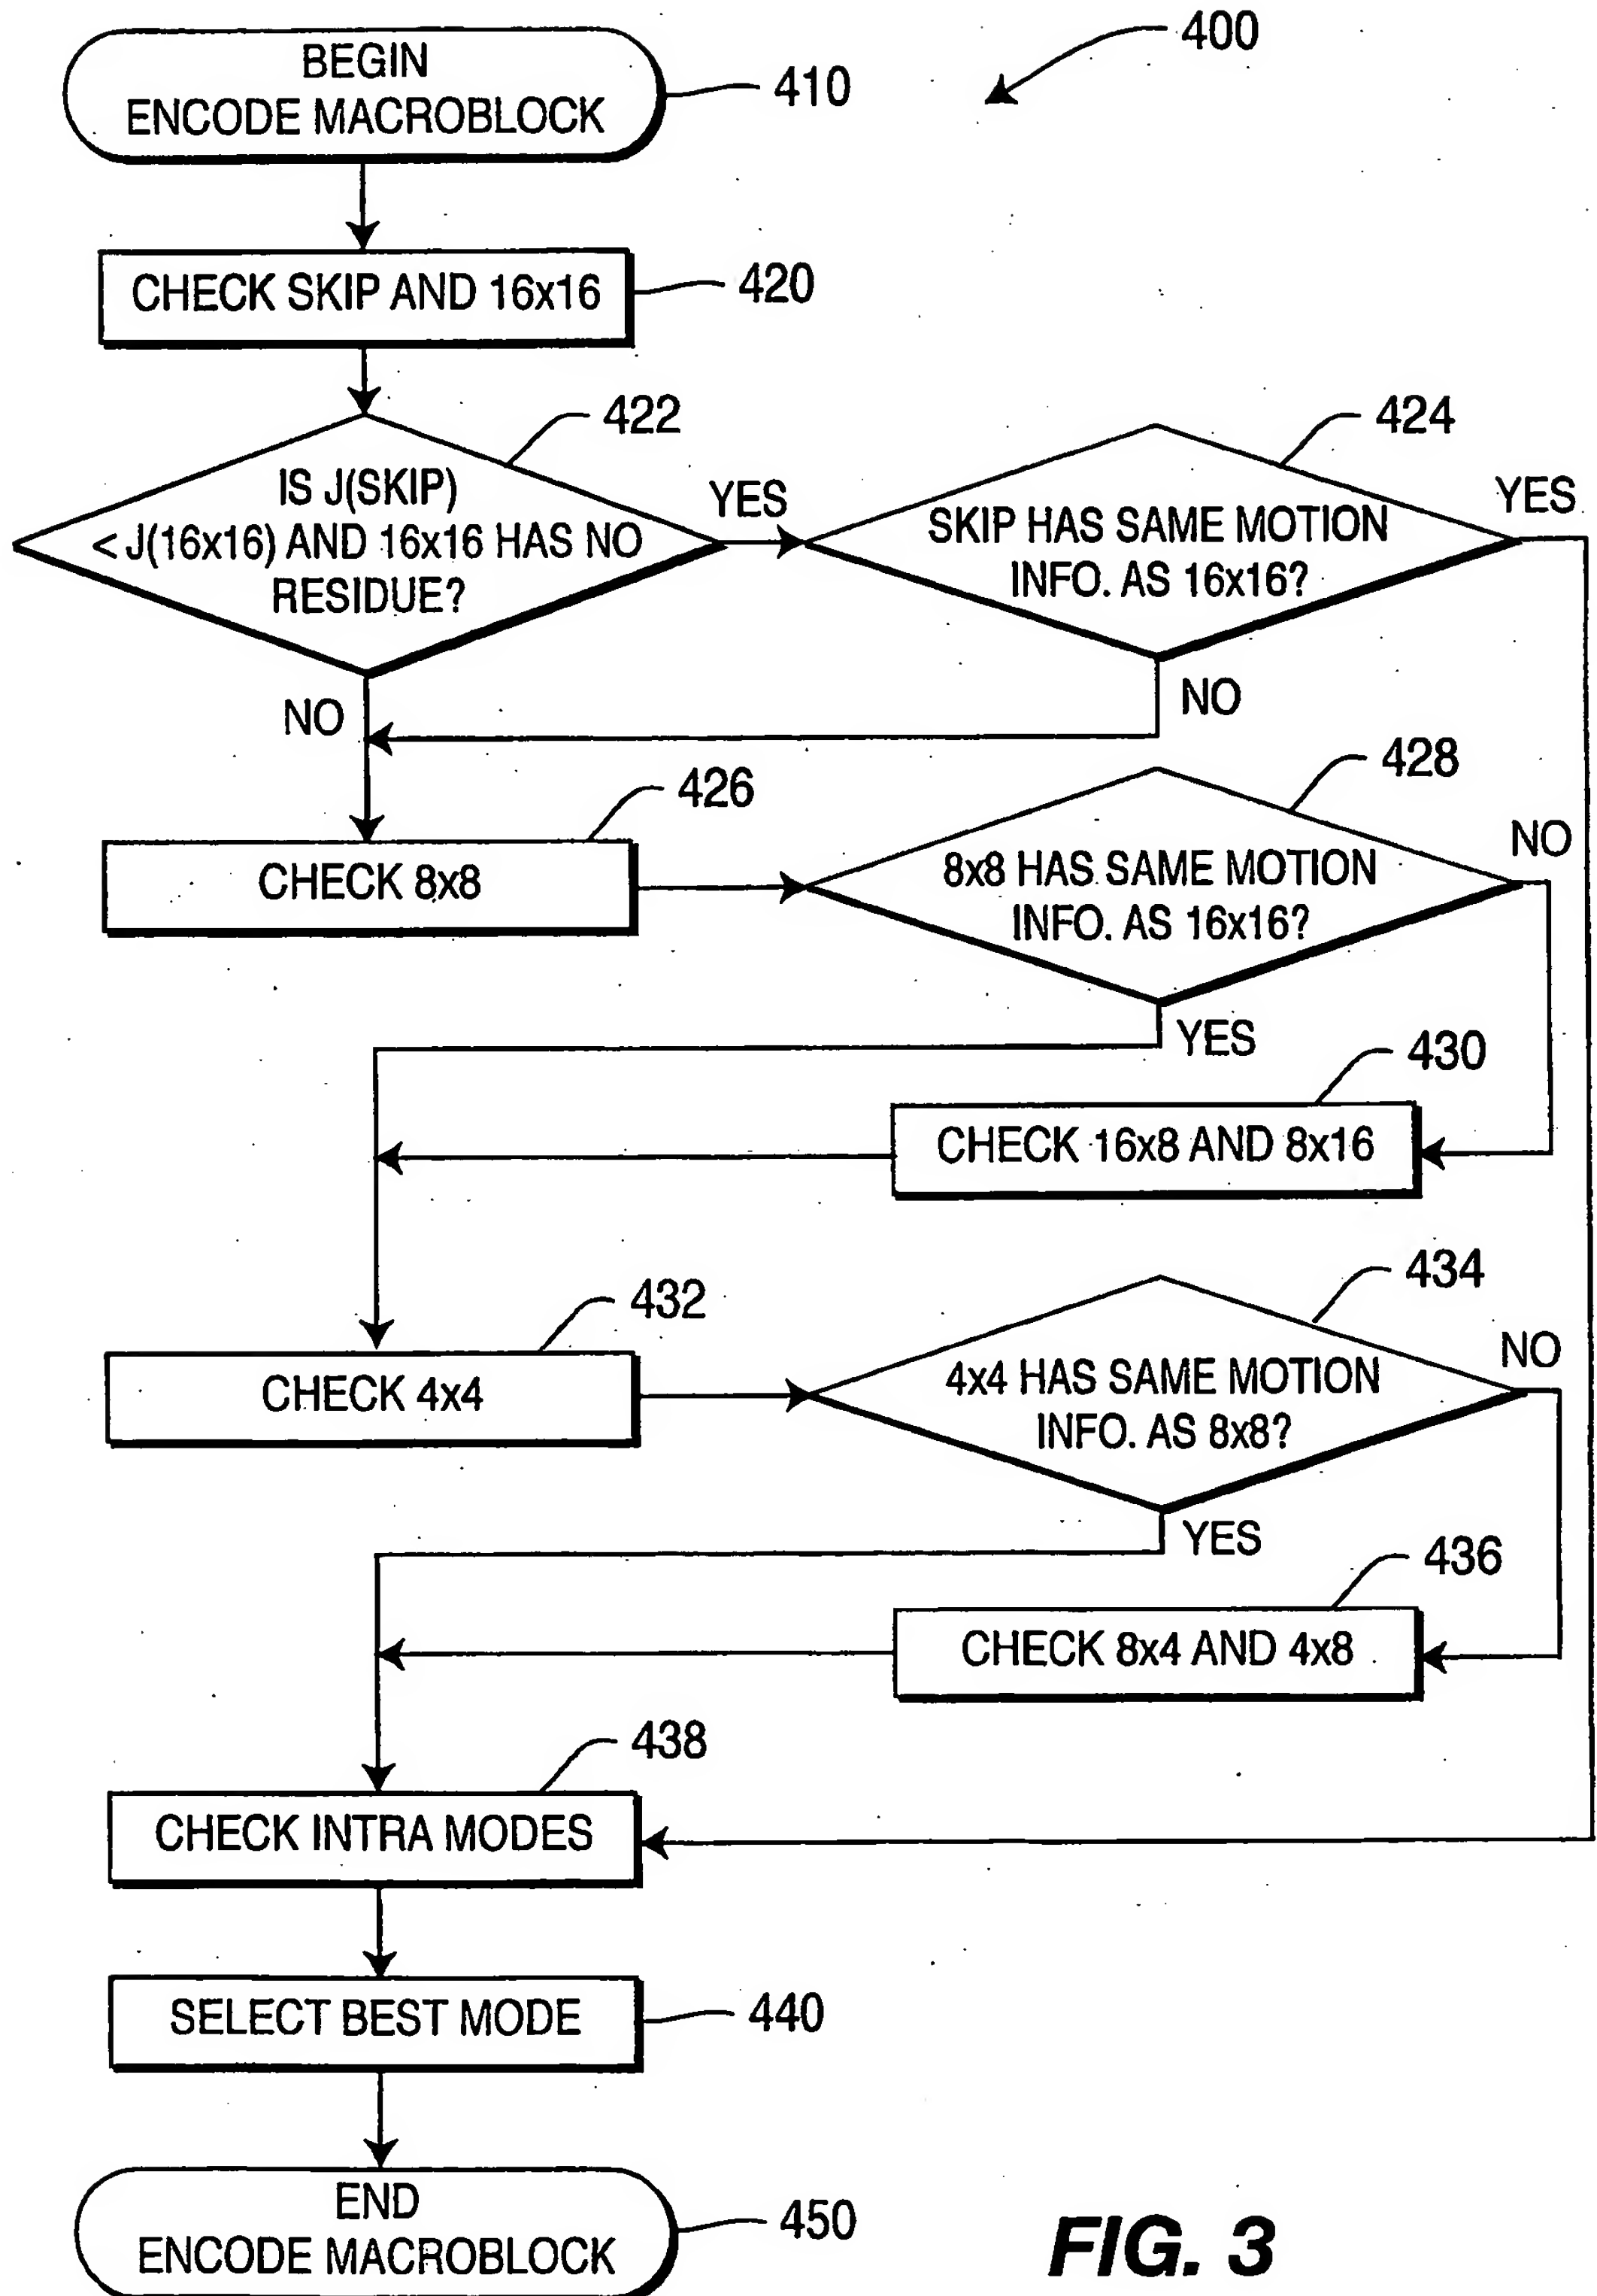
37. A video encoding method for selecting the encoding mode of a
macroblock of an inter-coded frame, the method comprising:

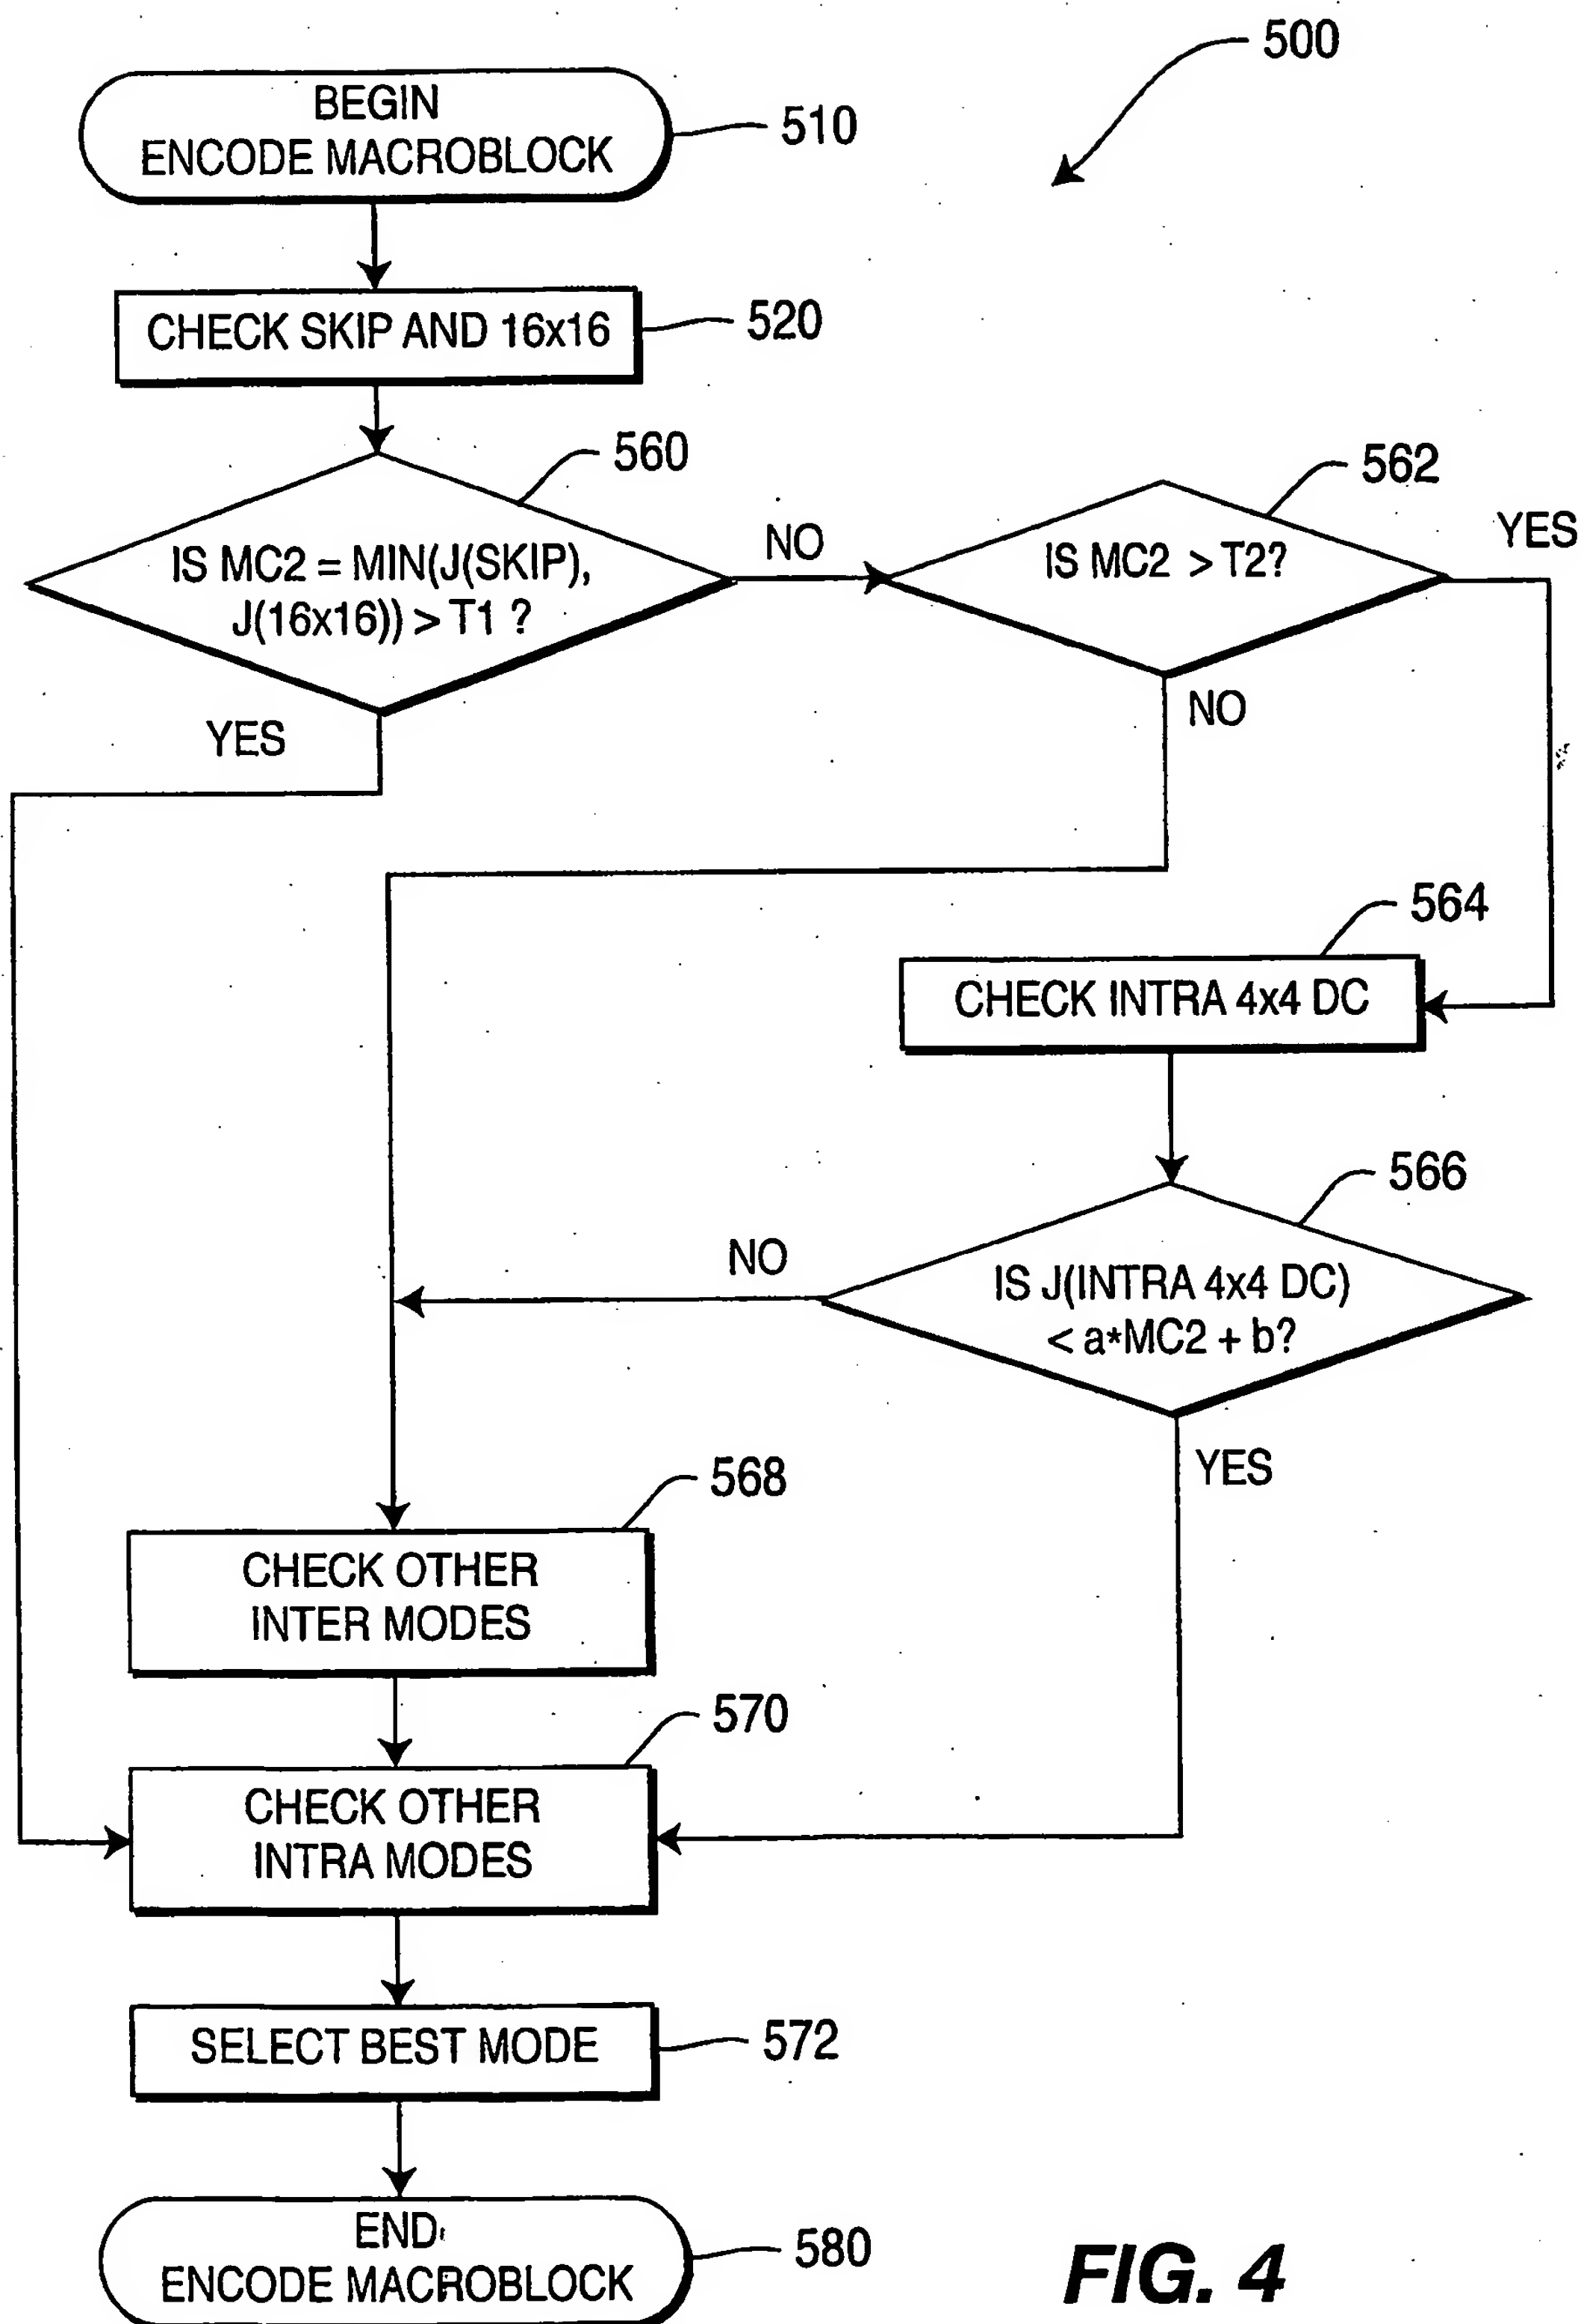
15 selecting a subset of macroblock modes for encoding;

comparing said subset of macroblock modes for coding efficiency; and

selecting a mode having favorable coding efficiency, responsive to said step of
comparing modes.

**FIG. 1****FIG. 2**



**FIG. 4**

A. CLASSIFICATION OF SUBJECT MATTER
 IPC 7 H04N7/26 H04N7/50

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
 IPC 7 H04N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	<p>BOJUN MENG ET AL: "Fast intra-prediction mode selection for 4x4 blocks in H.264" 2003 IEEE INTERNATIONAL CONFERENCE ON ACOUSTICS, SPEECH, AND SIGNAL PROCESSING. PROCEEDINGS. (ICASSP). HONG KONG, APRIL 6 - 10, 2003, IEEE INTERNATIONAL CONFERENCE ON ACOUSTICS, SPEECH, AND SIGNAL PROCESSING (ICASSP), NEW YORK, NY : IEEE, US, vol. VOL. 3 OF 6, 6 April 2003 (2003-04-06), pages III-389, XP002973809 ISBN: 0-7803-7663-3 the whole document</p> <p style="text-align: center;">----- -/-</p>	1-37

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- *Z* document member of the same patent family

Date of the actual completion of the international search

12 November 2004

Date of mailing of the international search report

23/11/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
 NL - 2280 HV Rijswijk
 Tel (+31-70) 340-2040, Tx. 31 651 epo nl,
 Fax (+31-70) 340-3016

Authorized officer

Schoeyer, M

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	<p>US 2003/099292 A1 (GANDHI RAJEEV ET AL) 29 May 2003 (2003-05-29) page 5, paragraph 71 - page 5, paragraph 74</p>	1-37
A	<p>-----</p> <p>JOCH A ET AL: "Performance comparison of video coding standards using lagrangian coder control" PROCEEDINGS 2002 INTERNATIONAL CONFERENCE ON IMAGE PROCESSING. ICIP 2002. ROCHESTER, NY, SEPT. 22 - 25, 2002, INTERNATIONAL CONFERENCE ON IMAGE PROCESSING, NEW YORK, NY : IEEE, US, vol. VOL. 2 OF 3, 22 September 2002 (2002-09-22), pages 501-504, XP010608018 ISBN: 0-7803-7622-6 page 502, left-hand column, paragraph 3. - page 502, right-hand column, paragraph 4.</p>	1-37
P,A	<p>-----</p> <p>TAMBANKAR A ET AL: "An overview of H.264 / MPEG-4 part 10" 4TH EURASIP CONFERENCE FOCUSED ON VIDEO IMAGE PROCESSING AND MULTIMEDIA COMMUNICATION, vol. 1, 2 July 2003 (2003-07-02), - 5 July 2003 (2003-07-05) pages 1-51, XP010650106 TAGREB, CROATIA page 13, last paragraph - page 19, paragraph 1</p>	1-37
L	<p>-----</p> <p>KIM C ET AL: "Multistage mode decision for intra prediction in H.264 codec" PROCEEDINGS OF THE SPIE, SPIE, BELLINGHAM, VA, US, vol. 5308, no. 1, 2004, pages 355-363, XP002285981 ISSN: 0277-786X page 355, paragraph 1 - page 356, paragraph 2.1</p> <p>-----</p>	1-37

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2003099292	A1	29-05-2003	CA 2468087 A1 05-06-2003
			EP 1449385 A2 25-08-2004
			WO 03047272 A2 05-06-2003
			CA 2468086 A1 05-06-2003
			EP 1459562 A2 22-09-2004
			WO 03047271 A2 05-06-2003
			US 2003099294 A1 29-05-2003
